

DATASHEET



road[®]



Technical information

Composition : Recycled aluminium 6063 T66


Aluminium alloy advantages :

- Does not rust, does not rot, does not crack
- Very resistant in extreme weather conditions
- Non toxic, non magnetic and non sparking
- Permanent installation
- Light and flexible
- Easy to install
- Frost resistant
- 100 % recyclable
- Environment friendly



Specifications

Lenght	Height A	Height B	Thickness	Weight /Length + stakes	Stakes / Length
2,30 lm	25 mm	45 mm	5.5 mm	1.15 kg	5
2,30 lm	40 mm	45 mm	5.5 mm	1.50 kg	5
2,30 lm	50 mm	45 mm	6 mm	1.65 kg	5
2,30 lm	65 mm	45 mm	6 mm	1.90 kg	5
2,30 lm	75 mm	70 mm	6.5 mm	2.6 kg	5
2,30 lm	100 mm	70 mm	7 mm	3.35 kg	5
2,30 lm	120 mm	70 mm	7 mm	4.20 kg	5
2,30 lm	150 mm	70 mm	8.5 mm	5.80 kg	5

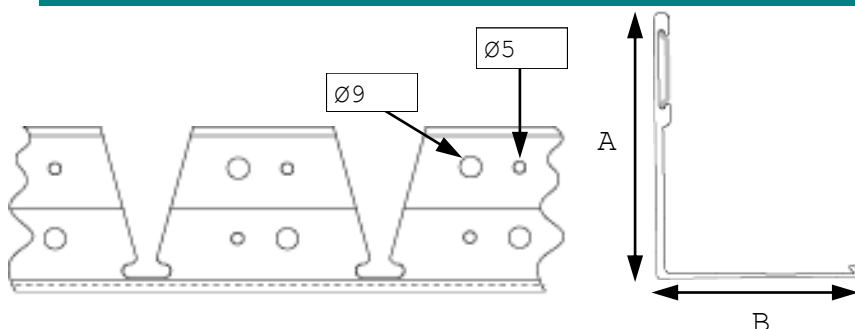

Terms and conditions :

Edges for hard surfaces in recycled aluminium 6063 T66. Height 25, 40, 50, 65, 75, 100, 120 ou 150 mm per 2,30 lm. Fixation by steel stakes of 7.5 mm diameter per 250 mm length. Type PLANTCOprotec Borderstyle Road or equivalent.